


Series F – Oil & Gas 플로팅 볼밸브 (Floating Ball Valve)



형식	Series F – Flanged (RF, RTJ), Butt weld
사이즈	• Series F - 50mm ~ 200mm
압력 범위	<ul style="list-style-type: none"> • 50mm RP / FP - ASME Class 150, 300, 600, 900, 1500 • 80mm RP - ASME Class 150, 300, 600, 900 • 80mm FP, 100mm RP / FP, 150mm RP - 150, 300, 600 • 150mm FP, 200mm RP / FP - ASME Class 150, 300
바디 (Body)	<ul style="list-style-type: none"> • Carbon Steel ASTM A216 WCB / A352 LCB, LCC • Stainless Steel ASTM A351 CF8M
볼 (Ball)	• Stainless Steel ASTM A182 F316
스텝 (Stem)	<ul style="list-style-type: none"> • Stainless Steel ASTM A479 SS 316 • Stainless Steel ASTM A479 S31803 (Duplex)
시트 (Seat)	• RTFE / PEEK / Delrin / Devlon / Nylon / Ultra
누수 등급	Class VI
설계 기준	API 6D, BS EN 17292, DIN EN 12516, ASME B16.34
검사 기준	API 598, BS EN 12266-1



DelVal® Series F

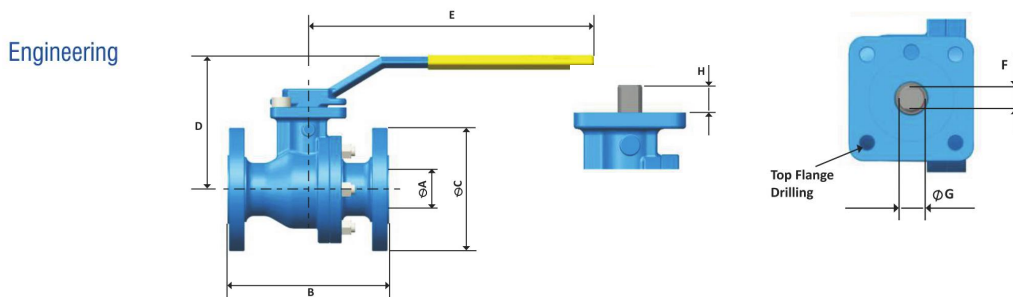

Sizes	Class	B		φA	φC	Top Flange drilling			φG	F	H	Key Size	D	E	Weights Kg.	
		RF	RTJ			BC	Hole dia	Nos								
2" RP	150	178	-	50×40	152	70	9.9	4	22	16	25	-	145	203	12	
2" FP		178	-	50	152	70	9.9	4	22	16	25	-	140	356	14	
3" RP		203	-	80×50	191	70	9.9	4	22	16	25	-	165	356	18	
3" FP		203	-	80	191	102	10.9	4	30	22	35	-	216	381	27	
4" RP		229	-	100×80	229	102	10.9	4	30	22	35	-	216	381	33	
4" FP		229	-	100	229	125	14	4	35	24	40	-	315	457	41	
6" RP		267	-	150×100	279	125	14	4	35	24	40	-	315	457	54	
6" FP		394	-	150	279	125	14	4	35	24	40	-	-	457	132	
8" RP		292	-	200×150	343	125	14	4	35	24	40	-	-	457	160	
8" FP		457	-	200	343	165	21.1	4	50	-	64	-	11.94×9.9	-	212	
2" RP		300	216	-	50×40	165	70	9.9	4	22	16	25	-	145	356	15
2" FP			216	-	50	165	102	10.9	4	22	16	25	-	178	381	17
3" RP	282		-	80×50	210	102	10.9	4	22	16	25	-	178	381	24	
3" FP	282		-	80	210	102	10.9	4	30	22	35	-	216	381	41	
4" RP	305		-	100×80	254	102	10.9	4	30	22	35	-	216	381	57	
4" FP	305		-	100	254	125	14	4	35	24	40	-	315	457	66	
6" RP	403		-	150×100	318	125	14	4	35	24	40	-	315	457	92	
6" FP	403		-	150	318	125	14	4	40	-	51	11.94×7.87	-	-	199	
8" RP	419		-	200×150	381	125	14	4	40	-	51	11.94×7.87	-	-	239	
8" FP	502		-	200	381	165	21.1	4	50	-	64	11.94×9.9	-	-	318	
2" RP	600		292	295	50×40	165	102	10.9	4	22	16	25	-	157	381	18
2" FP			292	295	50	165	102	10.9	4	22	16	25	-	178	381	21
3" RP		356	359	80×50	210	102	10.9	4	22	16	25	-	178	381	30	
3" FP		356	359	80	210	125	14	4	30	22	35	-	274	457	46	
4" RP		432	435	100×80	273	125	14	4	30	22	35	-	274	457	66	
4" FP		432	435	100	273	125	14	4	35	24	40	-	315	457	77	
6" RP	559	562	150×100	356	125	14	4	35	24	40	-	315	330	122		
2" RP	900	368	371	50×40	216	102	10.9	4	22	16	25	-	157	381	38	
2" FP		368	371	50	216	102	10.9	4	22	16	25	-	178	381	43	
3" RP		381	384	80×50	241	102	10.9	4	22	16	25	-	178	381	82	
2" RP	1500	368	371	50×40	216	102	10.9	4	22	16	25	-	157	381	52	
2" FP		368	371	50	216	102	10.9	4	22	16	25	-	178	381	59	