


Series 4 - 삼중 편심 버터플라이 밸브

Trio Triple Offset Butterfly Valves

DelVal® Series 4

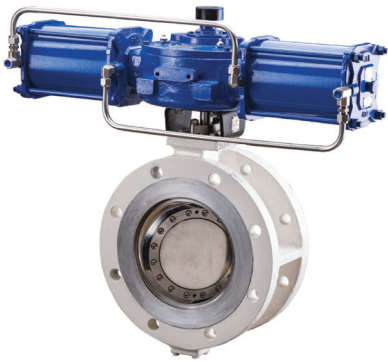

형식	Series 4 - Wafer, Lug, Double Flanged, Buttweld
사이즈	4A, 4B, 4C, 4P : 80mm ~ 2100mm 4D, 4E, 4F, 4Q : 80mm ~ 1500mm 4G, 4H, 4J, 4K : 80mm ~ 1200mm 4W, 4Y, 4K : 80mm ~ 600mm
압력 범위	4A, 4B, 4C, 4P, 4W - ASME Class 150 4D, 4E, 4F, 4Q, 4Y - ASME Class 300 4G, 4H, 4J, 4R, 4K - ASME Class 600
압력 / 온도	ASME B16.34
바디 (Body)	Carbon Steel ASTM A216 WCB, A352 LCC Stainless Steel ASTM A351 CF8 / CF8M
디스크 (Disc)	Carbon Steel ASTM A216 WCB, A352 LCC Stainless Steel ASTM A351 CF8 / CF8M
스텝 (Stem)	Stainless Steel ASTM A564 17-4 PH Stainless Steel ASTM A479 SS 410 Stainless Steel ASTM A479 XM - 19 Stainless Steel ASTM A479 SS 316
시트 (Seat)	Stainless Steel Stellite Gr.21
누수 등급	Class VI
연결 기준	ANSI, DIN, JIS
설계/검사 기준	API 609, BS EN 593 / API 598, BS EN 12266-1
*옵션 : LCB, Duplex SS, Super Duplex 가능	

사양 및 코드

설계(Design)	API 609, ASME B16.34, BS EN 593, MSS SP-68
시험(Testing)	API 598, BS EN 12266 Rate 'A' MSS SP-68, ISO 5208 Rate 'A'
면간 거리(Face to Face)	API 609, ISO 5752, BS EN 558, MSS SP-68
플랜지 규격	ASME B16.5, ASME B16.47 series 'B' 옵션 - BS EN 1092-1, AWWA C207
화재 안전(Fire Safe)	API 607
연결 마감 방법(Butt Weld Ends)	ASME B16.25
Pressure Equipment Directive	PED / 97 / 23 / EC
압력 등급	ASME Class 150, 300, 600(ASME B16.34)
온도 범위	-29°C ~ 425°C / -196°C ~ 700°C(옵션) (ASME B16.34)